Drawing Number PPS-0250 REV A

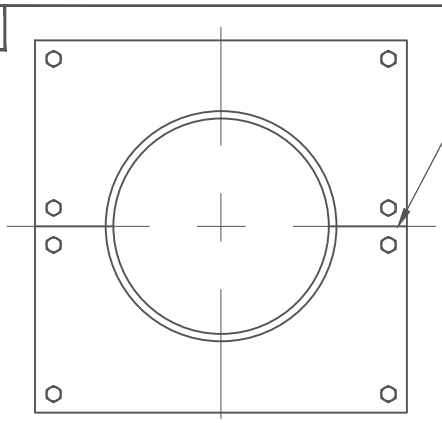

PLAN VIEW OF SPIGOT PLATE

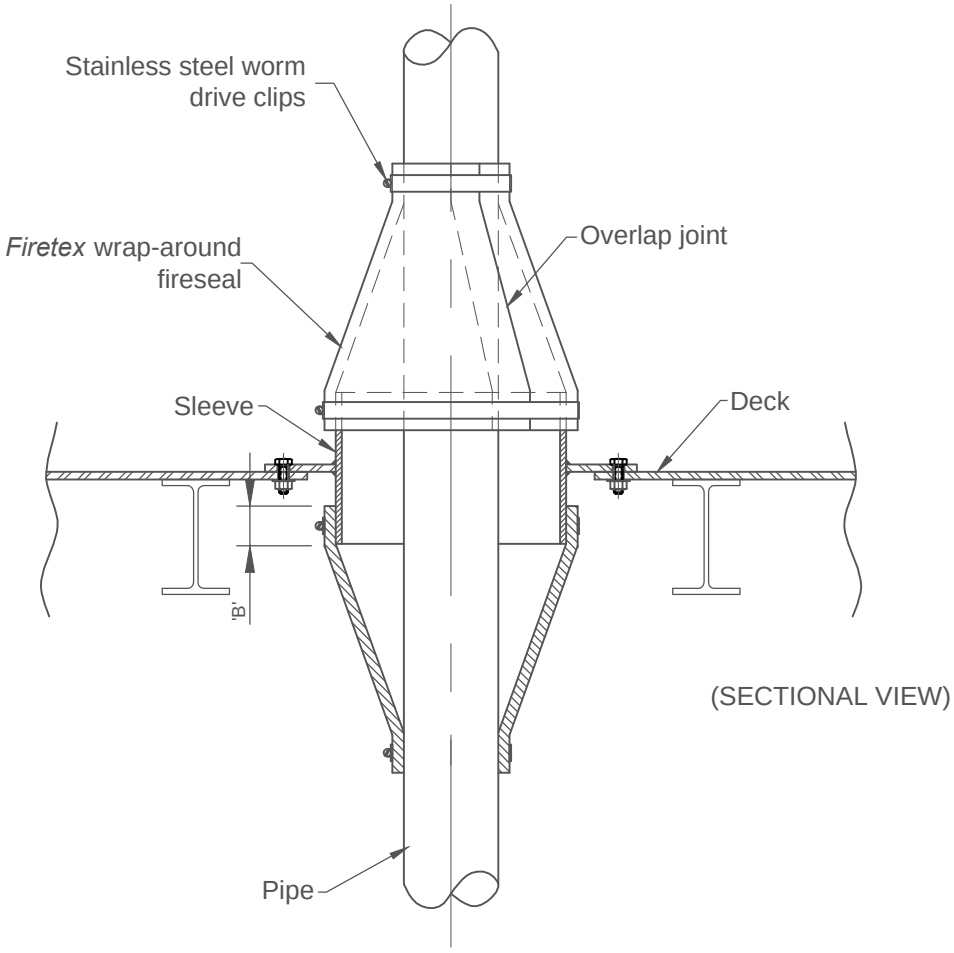

(SECTIONAL VIEW)

Notes:

MOVEMENT: Standard seal construction will accommodate +/-25mm in any plane.

CLIPPING: Each seal is supplied with fitting instructions, adhesive and stainless steel worm drive clips to suit pipe and spigot diameters. For diameters of 350mm and above 'double clipping' is required. The clipping length or cuff (B) is 50mm for single clips and 75mm for double clips.

GENERAL: The deck penetration solution featured here may also be applied to a bulkhead penetration. Spigot plate may be supplied by MCL if required.

Drawing Title:

SPECIAL FIRETEX PIPE PENETRATION SEAL SYSTEM - DOUBLE SPIGOT PLATE TYPE

MCL UNITEX LTD
MCL House, Adams Close,
Heanor Gate Industrial Park,
Heanor, Derbyshire,
DE75 7SW
United Kingdom
Tel: +44 (0)1773 761226
Fax: +44 (0)1773 533478
Web: www.mclunitex.com

O05151

Rev	Date	Revision detail	Drn	Chk'd	App'd
A	02/06/10	Values updated	M.A.T.	J.D.	N.R.T.
0	23/09/05	Drawing created	J.D.	N.R.T.	I.C.K.

Drawing Number PPS-0250 REV A